




**2008+ Mitsubishi Lancer GTS Exhaust Installation**

OEM Configuration

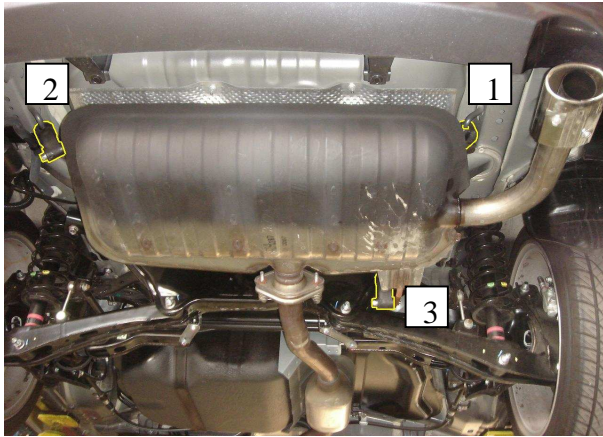

Alternate View

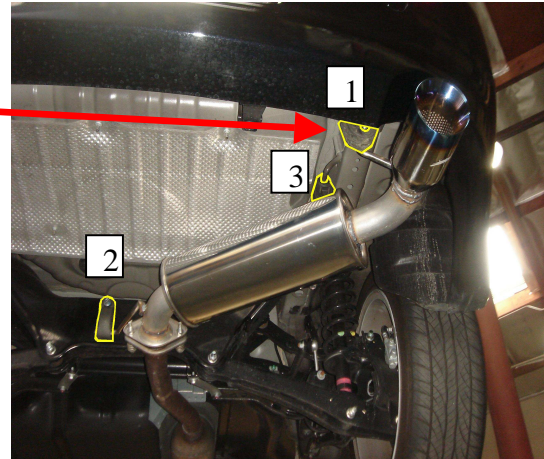

**GReddy Configuration**

Once the muffer has been removed, uninstall the Rubber Hangers. Keep track of where the hangers came from. (All Bolts removed from the OEM Configuration will be reused in the GReddy Configuration.)

Hanger 2 will be moved to the cross member using the OEM bolt and insert.

Hanger 3 will be moved to the old location of hanger 1 (remove bolt & insert).

Hanger 1 will be moved to the new location on the chassis behind the bumper using its original bolt, original bolt from hanger 3, and accompanied hardware.